


**NEW**  
Now in Sheet Form  
No More Curl



## Underlayment System for Setting Tile and Stone

- New and improved version offering easier installation
- Set Tile and Stone over any acceptable sub floor
- Up to 25 times lighter than 1/4" backerboard
- Excellent Acoustical & Crack Suppression
- Lightweight, only 28 lbs per 400 sf box
- Easily manageable 4' x 4' sheets, no more curl as with roll form, sheets lay flat and true
- Optional Peel & Stick available
- "Synthetic cork product" will not rot, support mold and mildew, or absorb moisture, very stable - heat & cold resistant

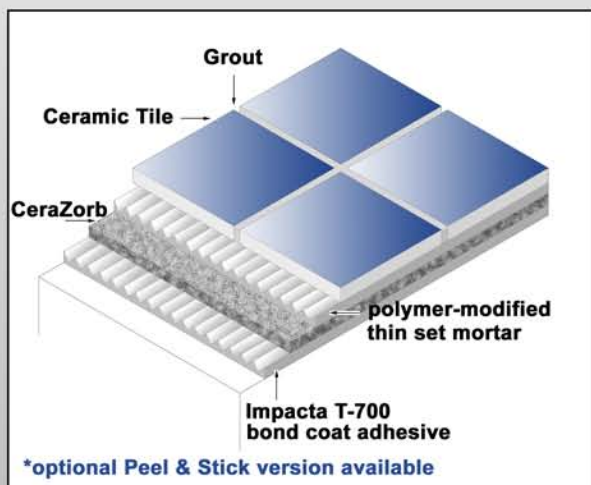

CeraZorb underlayment is a 5 mm thick underlayment system that has been specifically designed for setting Tile and Stone. CeraZorb offers high energy impact with low weight and will remain unchanged after repeated impact loads. CeraZorb is lightweight only 28 lbs per 400 sf box and is easily installed in 4' x 4' sheets and offers no more curling or memory as with rolls. CeraZorb can be installed with Impacta T-700 bond coat adhesive and is now available in a peel and stick version. CeraZorb can be installed below radiant floor heat and offers excellent insulating properties. CeraZorb is VOC free and environmentally friendly. CeraZorb offers credible acoustical impact isolation & crack suppression and is economically priced and readily available.

### Acoustical Data

Product	Wood Frame Construction	6" Concrete Slab (no ceiling)	Field IIC Test
CeraZorb 5 mm	IIC 53	Δ IIC 20	FIIC 59-7" slab

Visit [www.soundseal.com](http://www.soundseal.com) for field & lab tests

Note: Results may vary upon building and floor construction methods. Test procedure methods per standards set forth by ASTM E494-90, ASTM E989-89, ASTM E1007-97 and ASTM E2179-03.

### Uses - Applications

CeraZorb should be considered when setting tile and stone flooring where there are concerns regarding sound isolation and crack suppression. Applications include: condominiums, hotels, apartments, private homes, dormitories, hospitals, assisted living centers, schools, and many other applications not mentioned.

### Technical Data

	CeraZorb
Underlayment thickness	5 mm or 3/16"
Sheet size	4' x 4'
Qty per Box	25 sheets / 400 sf
Box Weight	28 lbs
R value	1.5
Peel & Stick available	Yes
TCNA Robinson test	Light Commercial
Acoustic testing on 6" slab no ceiling	ΔIIC 20



Sound Seal / Impacta Flooring Div  
50 H.P. Almgren Drive | Agawam, MA 01001  
Tel. 800.569.1294 | Fax 413.789.2248  
[www.CeraZorb.com](http://www.CeraZorb.com) | [impacta@soundseal.com](mailto:impacta@soundseal.com)

